



REVISION HISTORY		
REV.	DESCRIPTION	DATE
06	REVISED PER P11002	2013-07-16
07	REVISED PER P11002	2013-08-05
A	INITIAL RELEASE PER P11002	2013-08-19



15'[4572] CORD W/DUAL SWITCH LIGHTER ADAPTER

SPECIFICATIONS

- CERTIFICATIONS: **CE**; ECE R10; SAE J845 (DEC 2007) CLASS 1; CA Title 13 Class B; IP-35C For a Category 2 Enclosure
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: DOUBLE : 75 ± 5 FLASHES PER MINUTE
 QUAD : 75 ± 5 FLASHES PER MINUTE
 QUINT : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- CURRENT (PEAK): 6A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 76.8W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 15' CORD W/DUAL SWITCH LIGHTER ADAPTER
- MOUNTING: VACUUM/MAGNET MOUNT
- BASE MATERIAL: POLYCARBONATE
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 5.38 LBS (2.42 Kg)

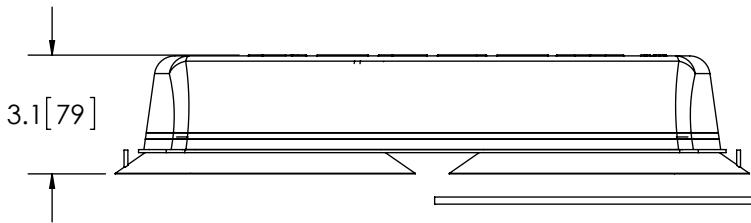

NOTES:
 1. DIMENSIONS IN INCHES [MILLIMETERS (FOR REFERENCE)]

SCALE 1:5		APPROVALS	DATE	 Electronic Controls Co. 833 West Diamond Street, Boise, ID 83705 800-635-5900 www.eccolink.com		
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: A		DRAWN BY: SNS	2013-08-05			
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE:		CHECKED: MDH				
MILLIMETERS DECIMALS: XX. ± 1.0mm XX.X ± 0.5mm		MECH. ENG.: NMT				
INCHES DECIMALS: X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02		ELEC. ENG.: TJT		LED MINIBAR, 8 HEAD, 12-24VDC, A, C1, VM CUSTOMER PART NO. 5590A-VM PRODUCT SERIES: 5500		
ANGLES: ± 0.5° FRACTIONS: ± 1/64		TEST ENG.: JRT				
THIRD ANGLE PROJECTION		SALES: GLB		SIZE: A	DWG. NO. 5590X-VM	REV. A
		Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: P11002	Date Created: 2013-03-01

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2013 ECCO