


SHORT TAPE MEASURES



The magnetic hook end sticks to attach to any metal surface. Stick it to a metal door frame and you can pace off 10 feet or more. Great for drop ceiling work, steel framing, HVAC, and shop work.

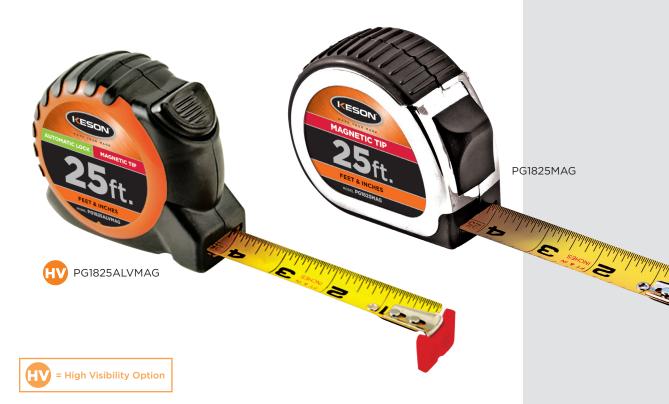

FEATURE	DEFINED	RATING	
Lock*	Slide	••••	
Case & Components	Chrome-Coated ABS	••••	
Blade	Nylon-Coated Steel	••••	
Impact Durability		••••	
Overall: 4.00 *The Chrom	ne model is 3.75 overall, the lock is not as nowe	rful as the Autolock version models	

Limited warranty

Elimited Warranty.									
MODEL	UPC (052837)	LENGTH	UNITS		STAND OUT (ft.)	BLADE (page 31)			
PG1825MAG	027521	25 ft.	ft, in, 1/8, 1/16 (1/32 first 12")	1	up to 8	В9			
PG1825VMAG	027828	25 ft.	ft, in, 1/8, 1/16 (1/32 first 12")	1	up to 8	В9			
PG1825ALVMAG	027811	25 ft.	ft, in, 1/8, 1/16 (1/32 first 12")	1	up to 8	В9			

AVAILABLE IN

B = 1-inch wide, 2x nylon-coated, short tape



B9 = Magnet, SAE: ft., in., 1/8, 1/16 (1/32 in. first ft.)