



BEACONS | MINIBARS | LIGHTBARS | DIRECTIONALS | WORKLAMPS | UTILITY BARS | INTERIOR LIGHTING | REVERSING SAFETY

SWITCHES

A9905SW Universal Flash Pattern Control

ECCO's A9905SW switch will allow the user to change flash patterns on minibars, beacons or LED directional surface mount lights. This universal switch is designed to work with most any product utilizing wire flash pattern control.

The switch provides on/off control and flash pattern selection on all products that utilize a single wire flash pattern selection system. The on/off switch is an illuminated toggle switch for 12V systems use only. The pattern selection switch is a momentary push-button which supplies +12V to the flash pattern trigger wire when pressed.

Models

PART NO.	VOLTAGE	AMPS	SWITCHES	TYPE
A9905SW	12	15	On/Off Flash Pattern Selection	Flash Pattern Control

Suggested Product Use


BEACONS	LED DIRECTIONALS	MINIBAR
7160, 7965/70, 7975/80	3510, 3611/12, 3715, 3730/35, 3811/61, 3931/32, 3900 Series, ED3766, Hide-A-LEDs, VigilLED	5580 5585 5590

Features and Benefits

- Composite, open-back with two mounting slots
- Easy to install and use

Dimensions

Height: 2.16"
Length: 3.5"

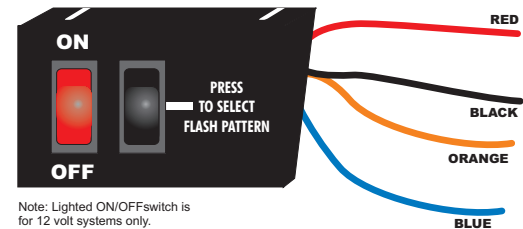

Note: Lighted ON/OFF switch is for 12 volt systems only.

- RED Wire** Connect to +12V (Use a fuse located close to source of power)
- BLACK Wire** Connect to ground
- ORANGE Wire** On/off output wire connect to load
- BLUE Wire** Connect to pattern select wire on power supply

